
TECHNICAL SHEET



Shower trays STONE DELUXE

Mineral marble shower tray with anti-slip surface



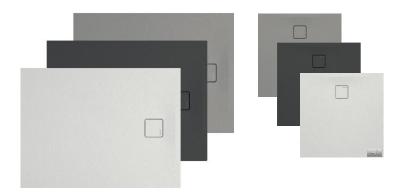









Fire-spread

Compliant

stant

Slip esistant

ain Easy to Clean stant and Maintain

Models:

Shower tray STONE DELUXE square
Shower tray STONE DELUXE rectangular

Technical information

Material	Model	Dimension [cm]	Weight [kg]	Dimension [cm]	Weight [kg]
mineral marble	square	80x80 90x90	23,5 kg 29,0 kg	100x100	35,5 kg
	rectangular	90x70 100x70 120x70 140x70 170x70 100x80 120x80 140x80 160x80	30,0 kg 32,7 kg 39,0 kg 45,8 kg 55,2 kg 37,0 kg 43,7 kg 51,0 kg 57,9 kg	170x80 180x80 100x90 120x90 140x90 160x90 170x90 180x90 120x100	61,5 kg 64,7 kg 40,0 kg 48,4 kg 56,8 kg 63,7 kg 68,3 kg 71,5 kg 53,7 kg
Remark:	- drainage hole Ø90 - depth 1,5 cm				

Declared properties

Tested properties	Requirement according to the European Standard	Confirmed level	
- cleanability	EN 14527:2016 +A1:2018 – 6.2.1		
- drainage of water	EN 14527:2016 +A1:2018 – 6.2.2	Pass Class 2	
- durability	EN 14527:2016 +A1:2018 – 6.3	3.335 2	
- slip resistance	DIN 51097 (92)	A+B+C	

Analysis of possible risks according to EU Regulation 2023/988


Material	Recognized risk	Risk elimination or reducing process	Tests conducted	Relevant EU norm
Mineral marble	Fulfilling the requirements of the Norm	Testing the product according to the requirements of the relevant standards.	Aquaestil Plus Laboratory test report No. TTK-240523-2 from 23.05.2024.	HRN EN 14527:2016 +A1:2018
	Hygiene and health risk	According to its composition, the product is intended for household use, but not for water consumption. Potential Health Effects Additives in this product do not present a respiration hazard unless the product is ground to a powder of respirable size and the dust is inhaled.	TDS from material supplier Moist-heat resistance – no faults at 100°C	EN 12721:1997
	Slipperiness of the surface	When getting in and out of the bathtub, hold on to a solid object or a handrail near the bathtub. Finishing the roughness of the surface by grinding or anti-slip coating.	Centro Di Ricerca e Sperimentazione Per L` Industria Ceramica Rapporto Di Prova N° 3703/17 from 27.03.2017. Resistenza allo scivolamento	DIN 51097 (92)
	Flammability	Do not leave smoldering or hot objects on the products as they may damage the surface. The surface material can be combusted only with difficulty.	TDS from material supplier Dry-heat resistance - no faults at 160°C	EN 12722:1997

TECHNICAL SHEET




Technical drawing according to the model:

STONE DELUXE SQUARE

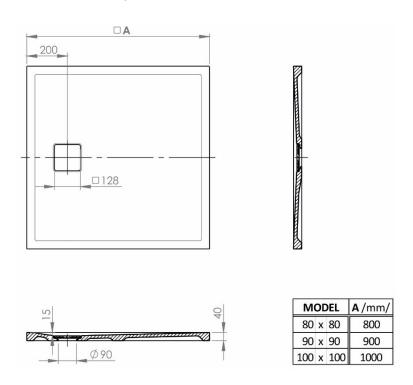

STONE DELUXE RECTANGULAR

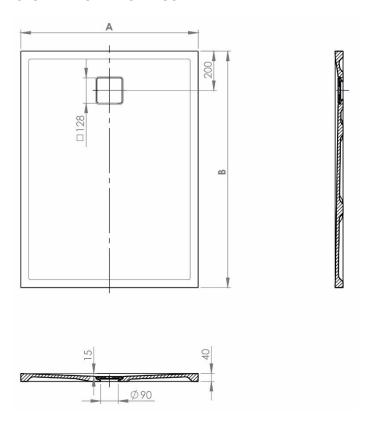

MODEL	A (mm)	B (mm)	
90x70	900	700	
100x70	1000	700	
120x70	1200	700	
140x70	1400	700	
170x70	1700	700	
100x80	1000	800	
120x80	1200	800	
140x80	1400	800	
160x80	1600	800	
170x80	1700	800	
180x80	1800	800	
100x90	1000	900	
120x90	1200	900	
140x90	1400	900	
160x90	1600	900	
170x90	1700	900	
180x90	1800	900	
120x100	1200	1000	

Technical Sheet – AQ 7454-006.01 Page 2 / 2